


HOSE PUMP Model VPH32 SHOE TECHNOLOGY




Specifications

Flow per revolution:	0,635 l
Max. discharge pressure:	15 bar
Std. connections:	flanged DN32 (ANSI 1 ¼")
Internal hose diam.:	mm.32
Max liquid temp.:	80°C (176°F)
Achievable suction:	up to 0,9 bar
Suitable for:	continuous operation

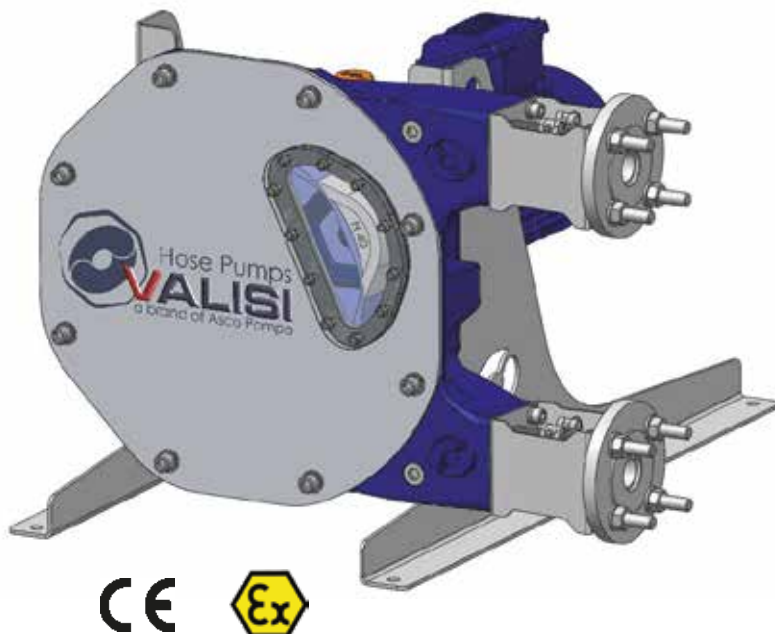

VPH32 Performance

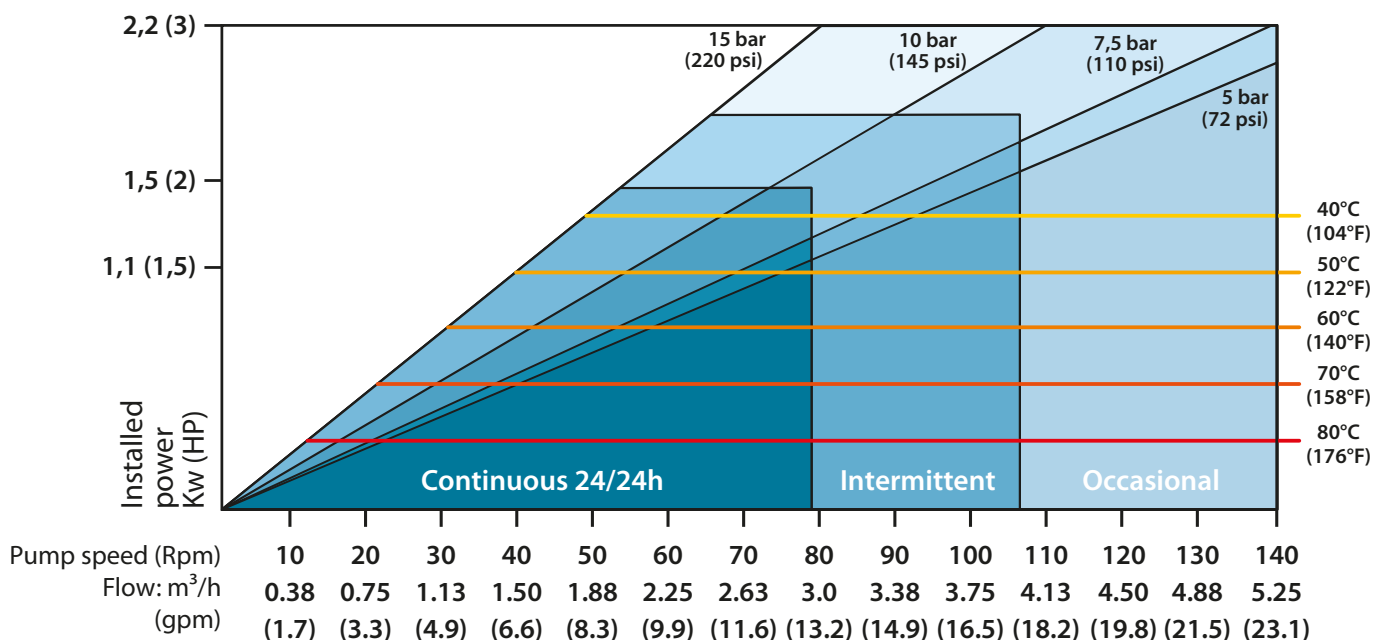


Excellence In Fluid Handling







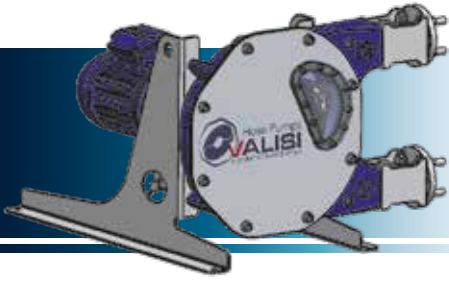


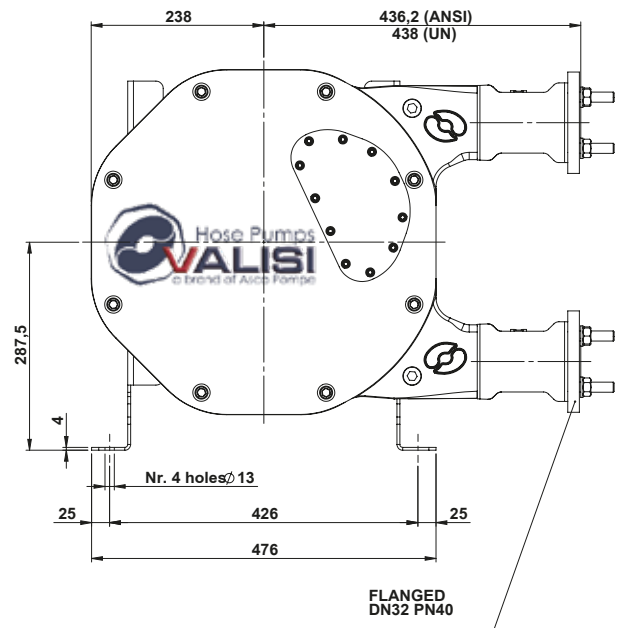
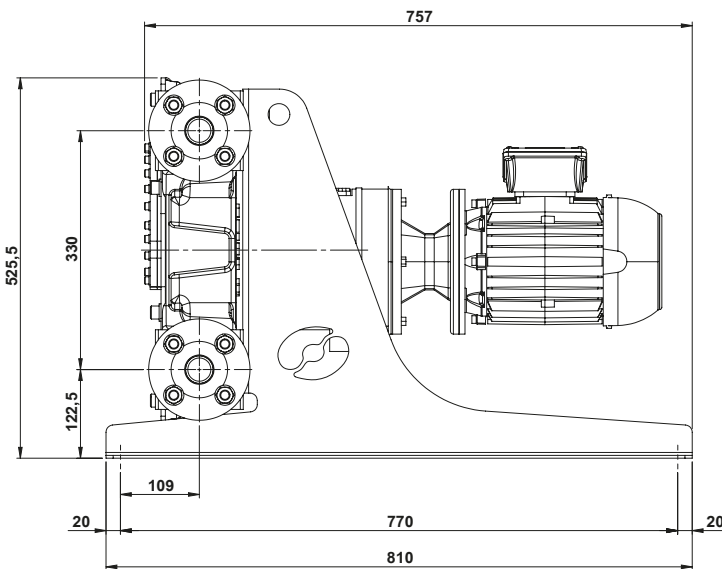
Valisi Hose pumps a brand of Asco Pompe

Via Silvio Pellico, 6/8 - 20089 Rozzano (MI) - ITALY
 Phone: +39 02 89257.1 - Fax: +39 02 89257.201
www.ascopompe.com - www.valisipumps.com
asco@ascopompe.com - info@valisipumps.com
hosepumps@valisipumps.com



Hose construction

-  NR (black hose, white stripe)
-  NBR - Nitrile (black hose, yellow stripe)
-  EPDM (black hose, red stripe)
-  Hypalon - CSM (black hose, blue stripe)
-  FKM - Viton® (black hose, purple stripe)
-  NR FDA - Natural rubber FDA (black hose with internal white layer, double white stripe)
-  NBR FDA - Nitrile FDA (black hose, white/yellow stripe)



Weight

Bare pump:	88 kg
Complete unit:	145Kg