


HOSE PUMP Model N6N

ROLLER TECHNOLOGY




Specifications

Max. Flow Rate:	4,15 m ³ /h (18,3 gpm)
Flow per revolution:	692 ml
Max. discharge pressure:	7 bar
Std. connections:	flanged DN40 (1" 1/2 ANSI)
Internal hose diam.:	mm.30
Max liquid temp.:	90°C (194°F)
Achievable suction:	up to 0,8 bar
Suitable for:	intermittent operation

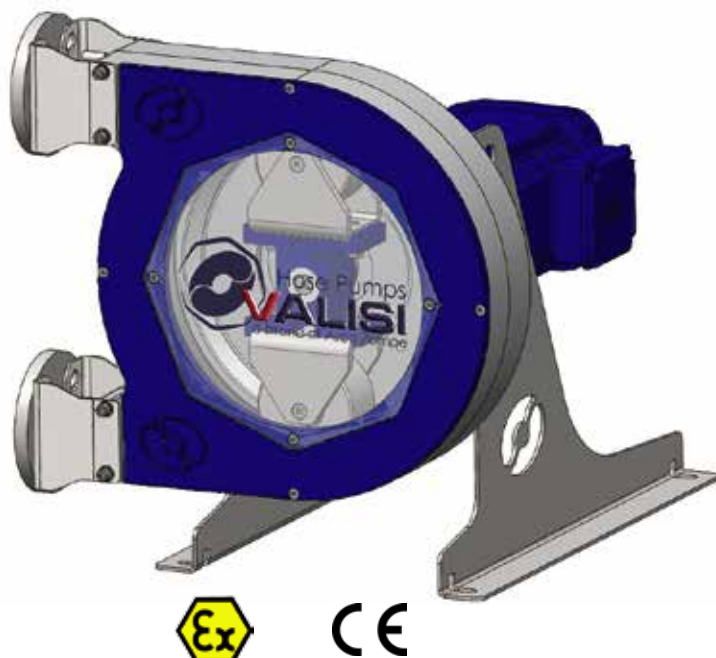

N6N Performance

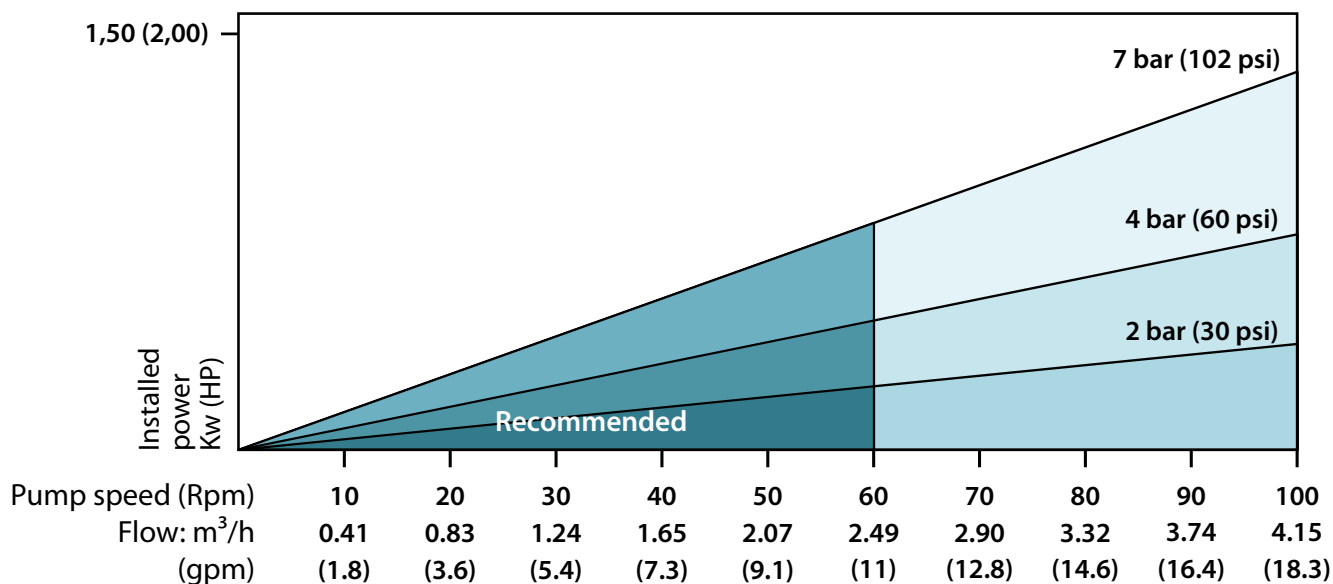


Excellence In Fluid Handling






Valisi Hose pumps
a brand of Asco Pompe

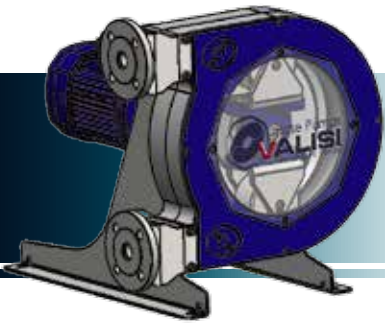Via Silvio Pellico, 6/8 - 20089 Rozzano (MI) - ITALY
Phone: +39 02 89257.1 - Fax: +39 02 89257.201
www.ascopompe.com - www.valisipumps.com
asco@ascopompe.com













Hose construction

Not reinforced:

-  Tygon A60F (Varprenne/Norprene A55F), FDA approved & NSF51 (cream white)
-  Neoprene (matt black)
-  Silicon (Red)

Fiber braided (reinforced):

-  NR (green stripe)
-  NRF-K long life (black hose with Valisi logo)
-  NBR (red stripe)
-  EPDM (white stripe)
-  NR Food grade (white & green stripe and white interior)
-  FKM - Viton® (purple stripe)
-  NBR Food Grade (black hose with white interior)
-  Hypalon (yellow stripe)

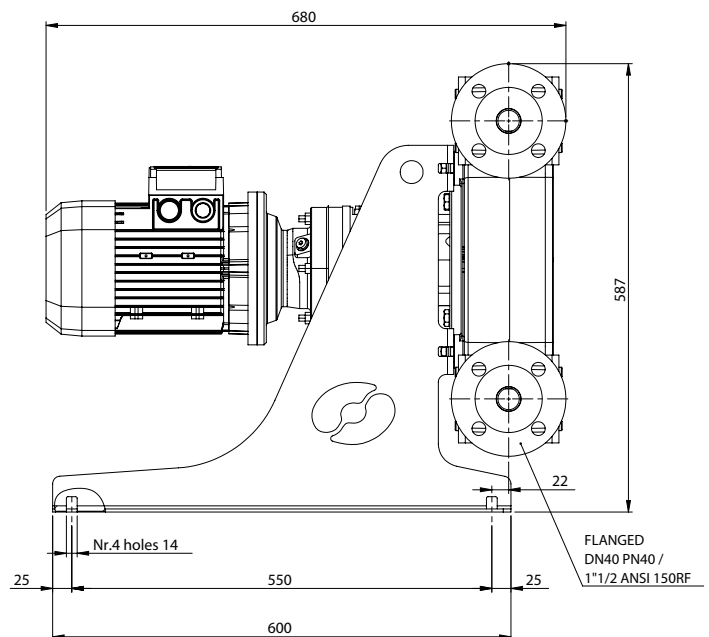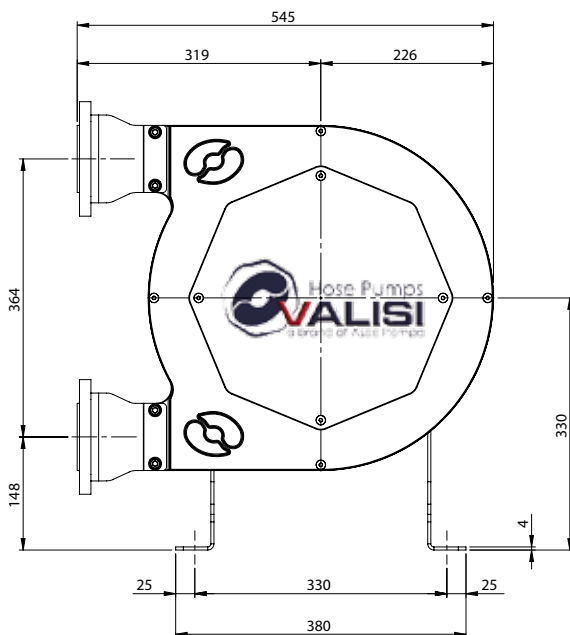

Weight

N6NF (fixed speed):	103 kg
N6NVM (mechanical variator):	116 Kg



Valisi Hose pumps a brand of Asco Pompe

Via Silvio Pellico, 6/8 - 20089 Rozzano (MI) - ITALY
 Phone: +39 02 89257.1 - Fax: +39 02 89257.201
www.ascopompe.com - www.valisipumps.com
asco@ascopompe.com